

## S100 Series

### PATENT DESIGN SPLIT LOCK

PATENT NO.:ZL201630283587. 1



S100-GG Bright Golden

### SPLIT HOTEL LOCK

Pure 304# stainless steel material  
Die casting 304# mortise latch and deadbolt  
Hidden cylinder ensure the security  
Imported PC material for the reader  
Breakdown change to different h



## S100 SERIES



S100-CR Satin Finish


S100-BN Black Nickel

### INTRODUCTION

- 304** 304#stainless steel reader,handle and collar.
- Backup** Backup mechanical key, brass +ABS.
- RF** Proximity RF technology,fast and stable.
- Die** with die casting stainless steel latch and deadbolt.
- Alarm** Low power alarm, guest card can still open the door.
- Software** User-friendly software, easy to use and management.

### PARAMETERS

Mechanism:304# reader,front/back panel and handle  
Unlock way: Mifare card or mechical key  
Power supply: 4xAA alkaline battery(DC6v)  
Static current: 25uA  
Dynamic current:< 150mA  
Working temperature:-20~45 degree  
Working humidity: 20~95%  
Available door thickness: 40~65mm  
Suggest usage: wood door

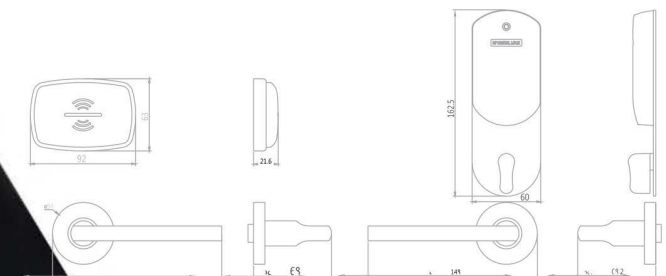

## S180 series

### PATENT DESIGN SPLIT LOCK

### SPLIT HOTEL LOCK


Pure 304# stainless steel material  
CNC made reader cover with mirror finish  
Imported leather handle with solid structure  
Die casting 304# mortise latch and deadbolt  
Hidden cylinder and pcb to ensure the security  
Imported PC material for the reader  
Free to change to different handles

## S180 Series



### PARAMETERS

Mechanism: 304# reader, front/back panel and handle  
Available to choose leather handle with solid structure  
Unlock way: Mifare card or mechanical key  
Power supply: 4xAA alkaline battery (DC6v)  
Static current: 25uA  
Dynamic current: < 150mA  
Working temperature: -20~45 degree  
Working humidity: 20~95%  
Battery life: Normal open: 15000 times  
Low power alarm: when power is less than 4.8v, there is di-di-di beep, then you can still open 150 times.  
Audit trial: 990 latest records include the mechanical key  
Available door thickness: 40~65mm  
Suggest usage: wood door

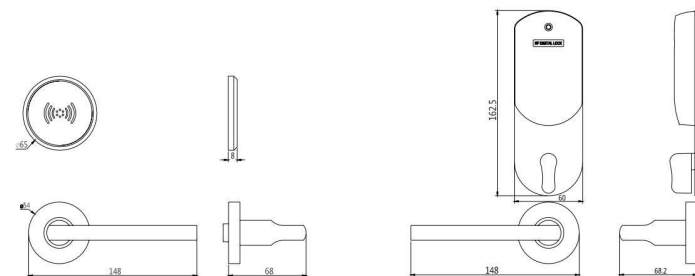

## S190 series

SPLIT HOTEL LOCK



## S190 series





### INTRODUCTION

- zn** Material: Zinc alloy handle and rosette
- key** Emergency cylinder hidden inside the handle
- RFID** Proximity RFID technology, fast and durable
- LED** LED indicator around the lock reader.
- lock** Special design for the hidden battery and pcb inside the mortise
- Bluetooth** Support bluetooth technology with mobile access

### PARAMETERS

#5 Zinc alloy handle, CNC aluminum reader  
Unlock way: Mifare card or mechanical key  
Power supply: 4xAAA alkaline battery (DC6v)  
Static current: 25uA  
Dynamic current: < 150mA  
Working temperature: -20~45 degree  
Working humidity: 20~95%  
Available door thickness: 40~65mm  
Suggest usage: wood door





# S170 series

SPLIT HOTEL LOCK





## INTRODUCTION

- zn** Material: Zinc alloy handle and rosette
- Emergency cylinder hidden inside the handle
- Proximity RFID technology, fast and durable
- LED** LED indicator around the lock reader.
- Special design for the hidden battery and pcb inside the mortise
- Support bluetooth technology with mobile access

## PARAMETERS

#5 Zinc alloy handle, CNC aluminum reader  
Unlock way: Mifare card or mechanical key  
Power supply: 4xAA alkaline battery (DC6v)  
Static current: 25uA  
Dynamic current: < 150mA  
Working temperature: -20~45 degree  
Working humidity: 20~95%  
Available door thickness: 40~65mm  
Suggest usage: wood door

 **TTHotel APP**  
management

 **TTLock APP**  
For home security/ office/ rental management



Scan QR code to install Guest APP





## E200 Series

### SLIM ELECTRONIC LOCK

E200-BN Black Nickel



## E200 Series



E200-GG PVD Golden E200-SS Satin Finish

### PARAMETERS

Mechanism: Arcylic reader, 304# front/back panel and handle  
CNC made handle collar and 304# stainless steel battery box cover  
ensure the use under high humidity area  
Unlock way: Mifare card or mechical key  
Power supply: 4xAA alkaline battery(DC6v)  
Static current: 25uA  
Dynamic current: < 150mA  
Working temperature: -20~45 degree  
Working humidity: 20~95%  
Battery life: Normal open: 15000 times  
Low power alarm: when power is less than 4.8v, thre is di-di-di beep,  
then you can still open 150 times.  
Audit trial: 990 latest records include the mechanical key  
Available door thickness: 30~65mm  
Suggest usage: wood door

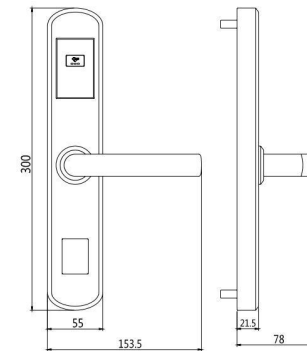

## E300 Series CLASSICAL HOTEL LOCK (RFID)

PATENT NO.: ZL201630285056. 6



E300-AC Antique Copper

## E300 SERIES




E300-GG PVD GOLDEN

E300-BN Black Nickel

E300-SS Satin Finish

### PARAMETERS

Mechanism: 304# front/back panel and handle  
304# cylinder cover and handle collar ensure the use under high humidity area  
Unlock way: Mifare card or mechanical key  
Power supply: 4xAA alkaline battery(DC6v)  
Static current: 25uA  
Dynamic current: < 150mA  
Working temperature: ~20~45 degree  
Working humidity: 20~95%  
Battery life: Normal open: 15000 times  
Low power alarm: when power is less than 4.8v, there is di-di-di beep, then you can still open 150 times.  
Audit trial: 990 latest records include the mechanical key  
Available door thickness: 30~65mm  
Suggest usage: wood door

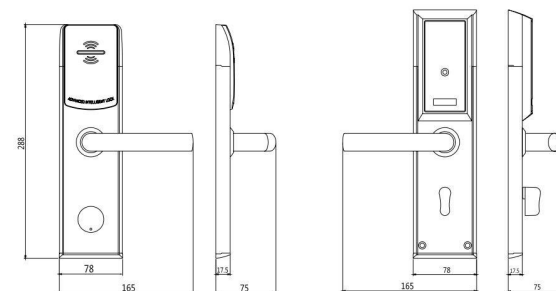



## C300 Series




C300-GG PVD Golden

C300-SS Satin Finish

### PARAMETERS

Mechanism: 304# front/back panel and handle  
304# cylinder cover and handle collar ensure the use under high humidity area  
Unlock way: Mifare card or mechanical key  
Power supply: 4xAA alkaline battery(DC6v)  
Static current: 25uA  
Dynamic current:< 150mA  
Working temperature:-20~45 degree  
Working humidity: 20~95%  
Battery life: Normal open: 15000 times  
Low power alarm: when power is less than 4.8v, there is di-di-di beep, then you can still open 150 times.  
Audit trial: 990 latest records include the mechanical key  
Available door thickness: 30~65mm  
Suggest usage: wood door

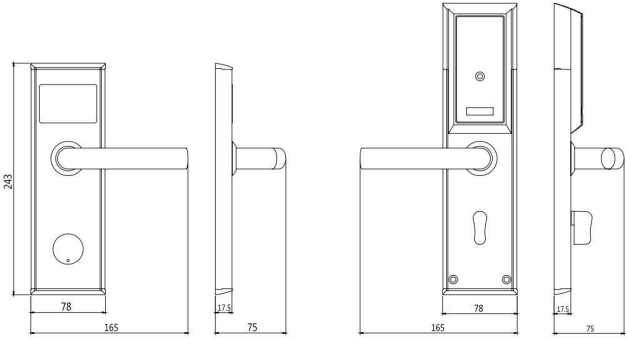





## E301 Series

CLASSICAL HOTELL LOCK(RFID)




## E301 Series

CLASSICAL HOTELL LOCK(RFID)

### Parameters :

- Classical RFID Hotel Lock
- 304# stainless steel panel and handle, anti-rust
- Proximity card technology, fast and reliable
- Sliding cylinder cover for easy use
- Work with ANSI standard mortise, stable and reliable
- Support Bluetooth system for management
- Emergency mechanical key for backup use
- Integrated with Opera PMS system, suitable for high class hotels



304

304#stainless steel reader, handle and collar.



Backup mechanical key, brass +ABS.



Proximity RF technology, fast and stable.



with die casting stainless steel latch and deadbolt.



Low power alarm, guest card can still open the door.



User-friendly software, easy to use and management.

## S500 Series Luxury Hotel Lock



### PROXIMITY ELECTRONIC LOCK

Luxury style lock for hotel/apartment use.  
With proximity technology, working frequency: 13.56MHZ.  
Standard treatment: Bright chrome and PVD golden.  
#5 Zinc alloy material for lock handle, panel, handle collar, good to use in high humidity area.  
Hidden cylinder design, provide you safety use.  
User-friendly software system, easy to install and maintain.  
With rustproof treatment, ensure long using life.  
Available to use on 30-60mm door.

## S500 Series




S500-GG PVD Golden



S500-CR Bright Chrome

### PARAMETERS

Mechanism: #5 Zinc reader, front/back panel and handle  
Hidden cylinder structure ensure the security  
Unlock way: Mifare card or mechanical key  
Power supply: 4xAA alkaline battery (DC6v)  
Static current: 25uA  
Dynamic current: < 150mA  
Working temperature: -20~45 degree  
Working humidity: 20~95%  
Battery life: Normal open: 15000 times  
Low power alarm: when power is less than 4.8v, there is di-di-di beep, then you can still open 150 times.  
Audit trial: 990 latest records include the mechanical key  
Available door thickness: 30-65mm  
Suggest usage: wood door

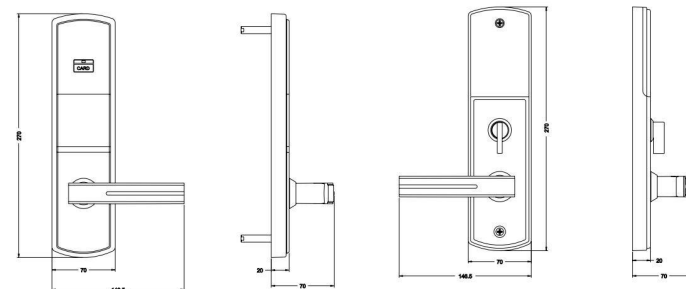



## JK700 Series

EUROPE HOTEL LOCK



Europe Style Hotel Lock  
Work with 60/85 mortise with panic function  
Very convenient to replace the old locks  
304# stainless steel material for long time use.  
Patent handle structure, easy to change from left to right  
With rubber gasket and sealed PCB to prevent the water


## JK700 Series



JK700-SS Satin Finish

### PARAMETERS

Mechanism: 304# reader, front/back panel and handle  
Patent handle structure with bearing inside to ensure the smooth  
Unlock way: Mifare card or mechanical key  
Power supply: 4xAAA alkaline battery (DC6v)  
Static current: 25uA  
Dynamic current: < 150mA  
Working temperature: -20~45 degree  
Working humidity: 20~95%  
Battery life: Normal open: 15000 times  
Low power alarm: when power is less than 4.8v, there is di-di-di beep,  
then you can still open 150 times.  
Audit trial: 990 latest records include the mechanical key  
Available door thickness: 40~65mm  
Suggest usage: wood door/aluminum door

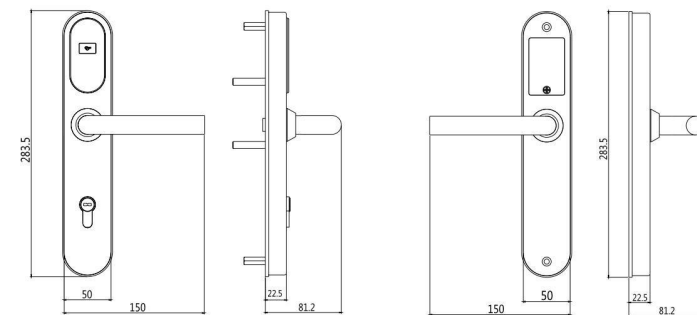



## M800 RFID Hotel Lock



## M800 RFID Hotel Lock SERIES



M800-BN(Black Nickel)




M800-SS(Stainless steel)

### INTRODUCTION

Mechanism: Acrylic reader, 304# front/back panel and handle  
 304# stainless steel handle collar and battery box cover  
 ensure the use under high humidity area  
 Unlock way: Mifare card or mechanical key  
 Power supply: 4xAAA alkaline battery(DC6v)  
 Static current: 25uA  
 Dynamic current: < 150mA  
 Working temperature: -20~45 degree  
 Working humidity: 20~95%  
 Battery life: Normal open: 15000 times  
 Low power alarm: when power is less than 4.8v, there is di-di-di beep,  
 then you can still open 150 times.  
 Audit trial: 990 latest records include the mechanical key  
 Available door thickness: 30~65mm  
 Software: Opera Fidelio integrated

### DIMENSION

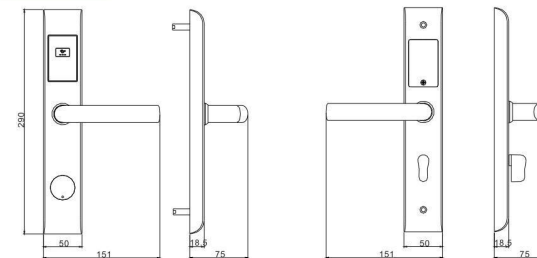





E900 SERIES

ALUMINUM HOTEL LOCK SERIES

## E900 Series Aluminum Hotel Lock

### Parameters :

- Mechanism: Arcylic reader, solid aluminum panel and handle and battery box cover ensure the use under high humidity area
- Unlock way: Mifare card or mechanical key
- Power supply: 4xAA alkaline battery(DC6v)
- Static current: 25uA
- Dynamic current: < 150mA
- Working temperature: -20~45 degree
- Working humidity: 20~95%
- Battery life: Normal open: 15000 times
- Low power alarm: when power is less than 4.8v, there is di-di-di beep, then you can still open 150 times.
- Audit trial: 990 latest records include the mechanical key
- Available door thickness: 30~65mm
- Suggest usage: wood door
- Software: Opera Fidelio integrated



304# stainless steel reader, handle and collar.



Backup mechanical key, brass +ABS.



Proximity RF technology, fast and stable.



with die casting stainless steel latch and deadbolt.



Low power alarm, guest card can still open the door.



User-friendly software, easy to use and management.




## E901 series Bluetooth Hotel Lock



E901-BN

E901P-SS

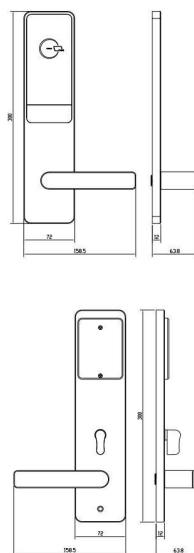

## E901 series BLUETOOTH DIGITAL LOCK

### Parameters :

- Classical design Bluetooth lock
- Unlock by Bluetooth APP/IC Card/Passcode or mechanical key
- 304# stainless steel material for lock handle and cylinder cover
- Work with ANSI mortise with 500000 times lifespan

- Free handle design to avoid the artificial damage
- Widely used to replace the apartment or office
- Available to change to Bluetooth hotel lock for hotel use.
- Support BS system with card encoder for management(Hotel version only)
- Emergency mechanical key, no worry for the unlock if there is no power






# H160

## H160 series


### Lever Handle Hotel Lock

#### Parameters :

- Patent design for the RFID card hotel lock
- Concealed clutch and PCB inside the handle
- 5# zinc alloy lock handle and cylinder plate
- Bright chrome or black nickel polish treatment
- Free handle with patent clutch inside, pull up the handle to activate the deadbolt.
- Various mortises available(45/85,50/85,60/85,70/85)
- Widely used to replace the old Europe style mechanical locks
- Available to change to BLE fingerprint lock for office use.
- Work with IC card and mechanical key, with lock software for management

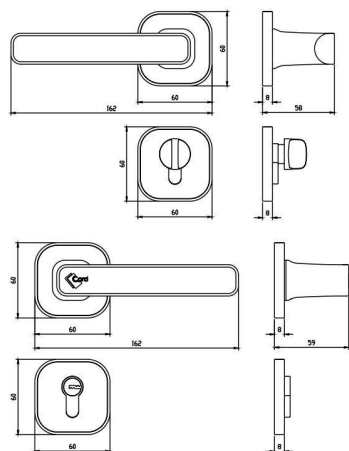

## Series Lever Handle Hotel Lock

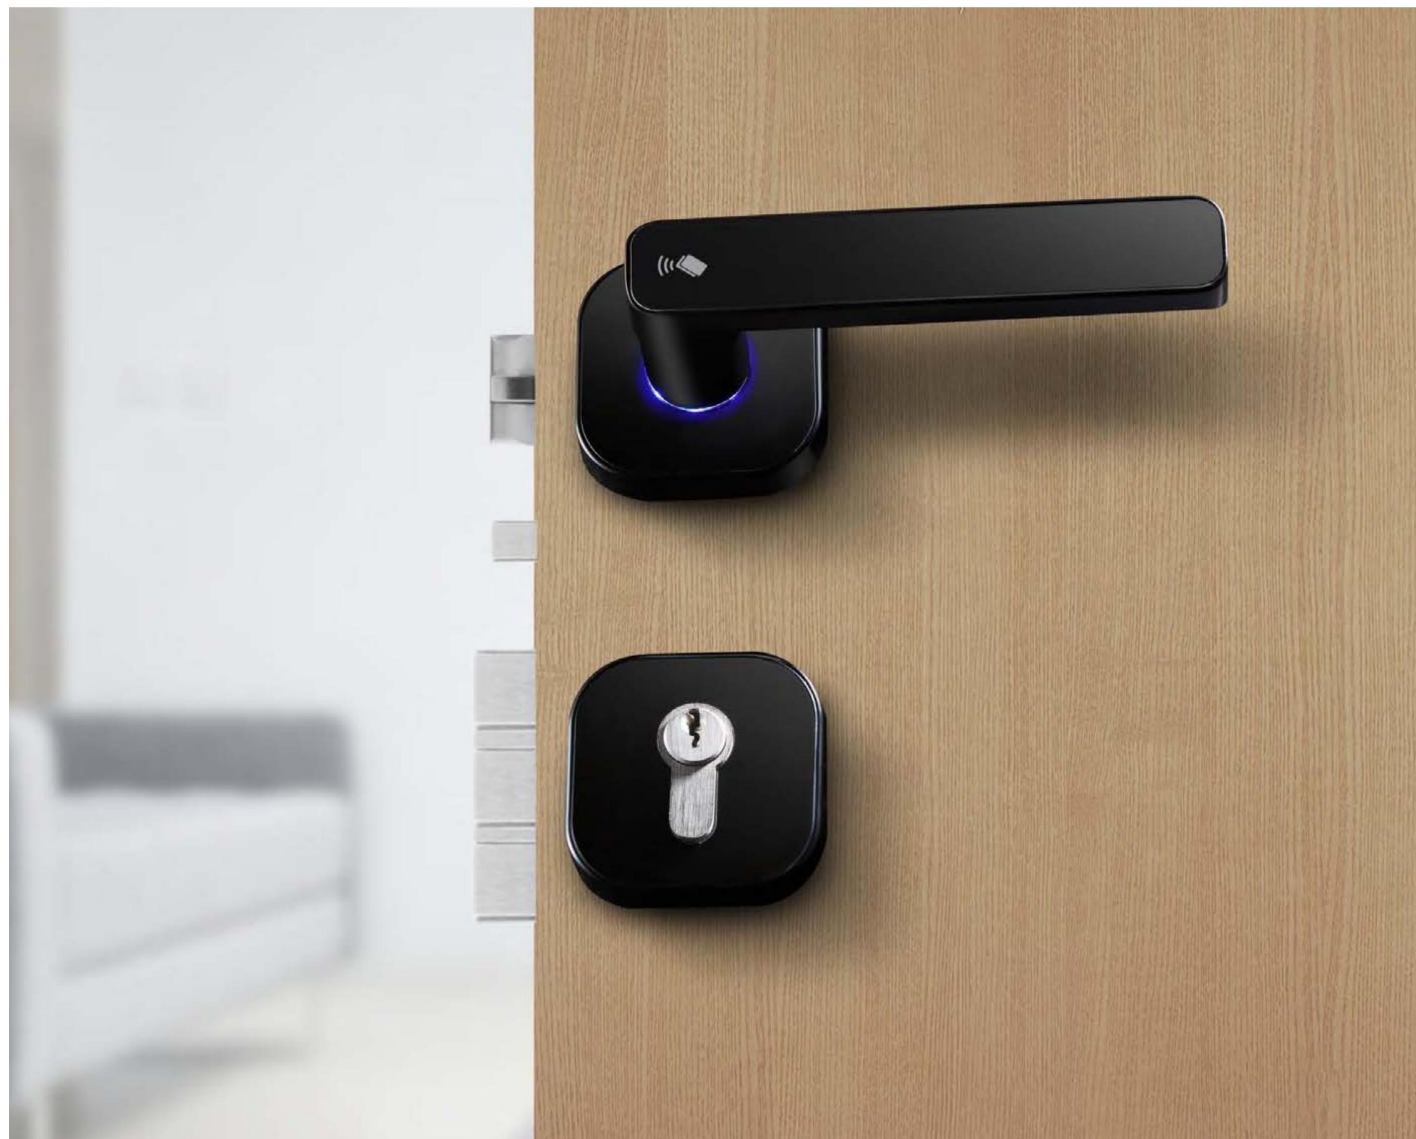


## A210 Series

### Slim Aluminium Door Lock

#### Parameters :

- Semi-conductor fingerprint sensor, stable and 360 degree recognition
- Work with fingerprint, passcode, IC card and mechanical key
- Support BLE app and Wi-Fi gateway for easy management
- 304# stainless steel lock panel and handle
- Mirror polish treatment on the bevel side for elegant design
- Free handle with patent clutch inside, pull up the handle to activate the deadbolt.
- Various mortises available(35/85, 45/85, 50/85, 60/85, 70/85)
- Widely used for aluminum door or swing door (hook type optional).

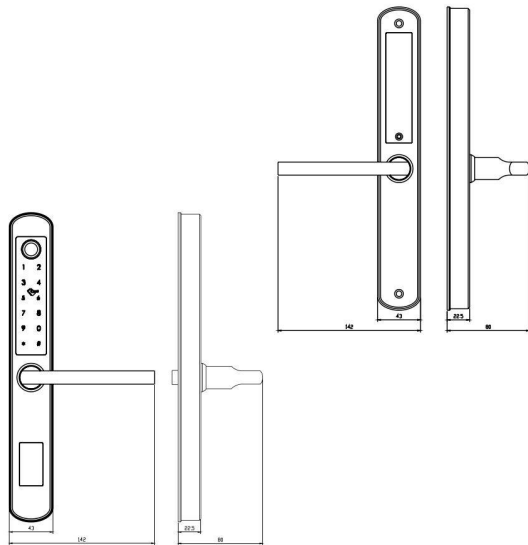

## A210 Series


### Slim Aluminium Door Lock



one time password



timed password

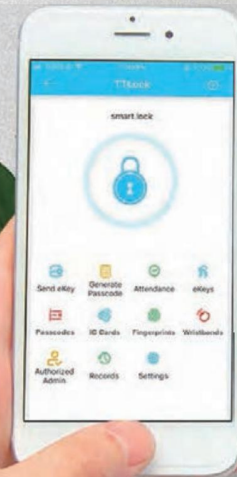



## A220 Series Deadbolt Lock



Black




Satin Nickel


### Parameters :

- Patent design, designed by Italy engineer
- 5# Zinc alloy lock panel
- Satin polish or black nickel treatment
- Acrylic reader with 12 digits passcode
- Work with BLE app, passcode, IC card and mechanical key
- America type cylinder with high security mechanical keys
- Auto lock and auto unlock with 60/70 adjustable deadbolt
- Perfect choice to replace the old locks without extra holes.
- Widely used for wood door or replace the knob locks.

## TTLOCK BLUETOOTH SOLUTION TUYA WIFI SOLUTION

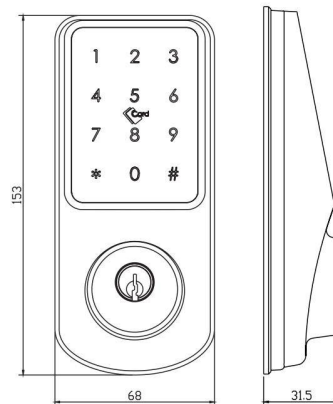

## A220 Series Deadbolt Lock

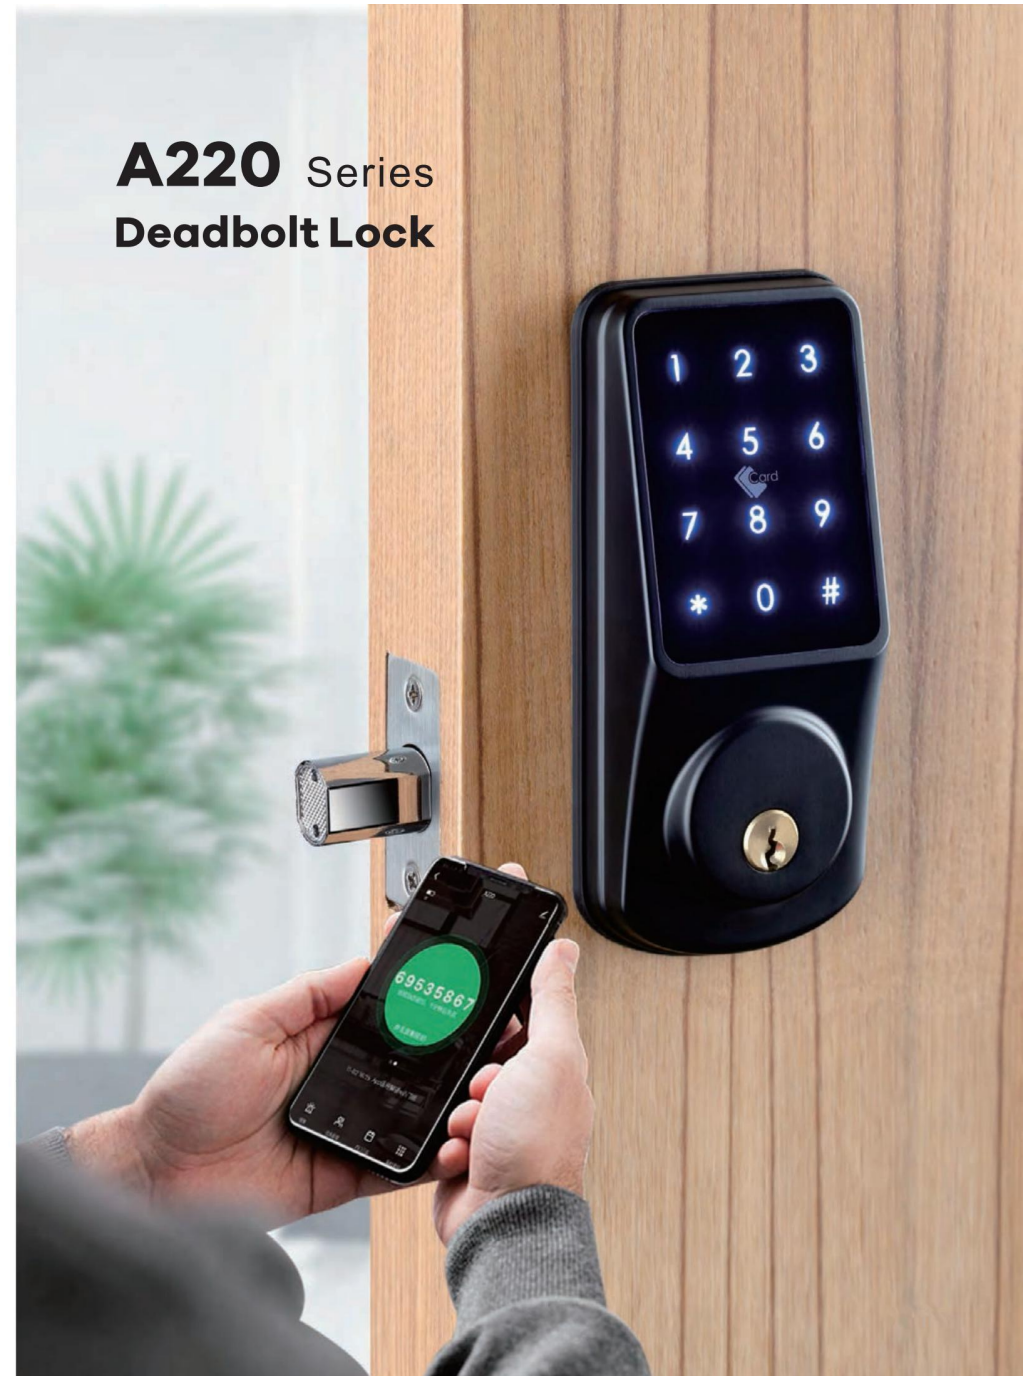





## A230P Bluetooth Digital Lock SERIES



A230P-BN(Black Nickel)



A230P-SS(Satin nickel)

### INTRODUCTION

Smart Digital Lock

304# stainless steel material for handle, zinc alloy panel

Die casting 304# stainless steel mortise latch and deadbolt

Touchscreen keypad

Work with passcode or card or wristband

Bluetooth technology to unlock the door

Support WIFI router to remote change the admin passcode

No need front reception, save your labor cost and management

Real time unlocking record in the mobile APP

Passcode has time limit or times limit



Support Ekey to unlock the door

Support bracelet to unlock the door

Support external power for supply

Work with alkaline battery, 12 months battery life.

### DIMENSION



## A230N series Fingerprint Lock



Black




Satin Nickle

### Parameters :

- Patent design, designed by Italy engineer
- 5# Zinc alloy lock panel
- Satin polish or black nickel treatment
- Acrylic reader with 12 digits passcode
- Work with BLE app, passcode, IC card and mechanical key
- America type cylinder with high security mechanical keys
- Auto lock and auto unlock with 60/70 adjustable deadbolt
- Perfect choice to replace the old locks without extra holes.
- Widely used for wood door or replace the knob locks.

### TTLOCK BLUETOOTH SOLUTION TUYA WIFI SOLUTION

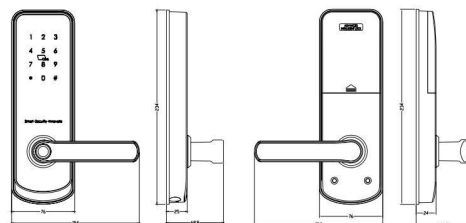

## A230N series Fingerprint Lock



Handle with sensitive  
fingerprint scanner




≤ 0.5 seconds  
unlock



Convenient APP  
management



Compatible with  
5050 / 5072 / 4585  
/ 6052 mortise etc

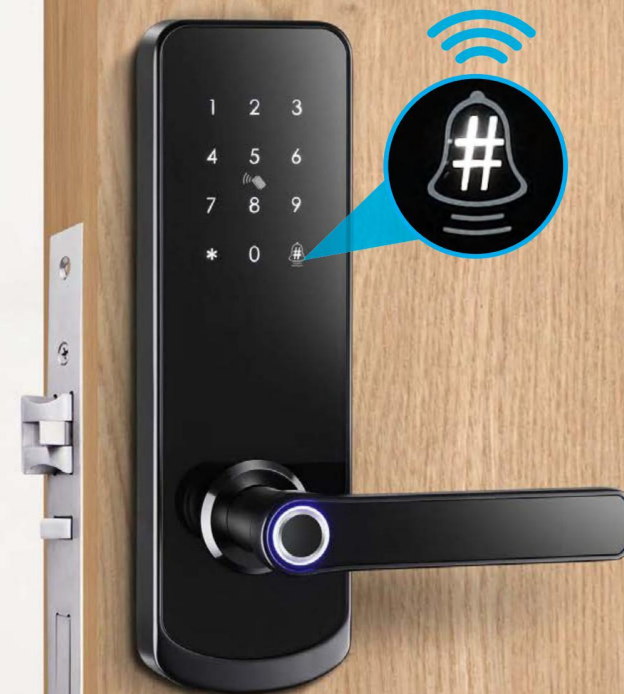



# A260 series Fingerprint Lock



Black




Satin Nickel

## Parameters:

- Smart BLE Digital Fingerprint Lock
- Work with proximity card
- Aluminum alloy panel/handle
- Black oxidation treatment
- Available for 60/85,55/72 mortise or single latch
- Work with alkaline battery
- Emergency key for backup use
- 300,000 times life test
- Work with bluetooth technology
- Support remote passcode change
- Available for WIFI router for remote management(optional)

## TTLOCK BLUETOOTH SOLUTION TUYA WIFI SOLUTION

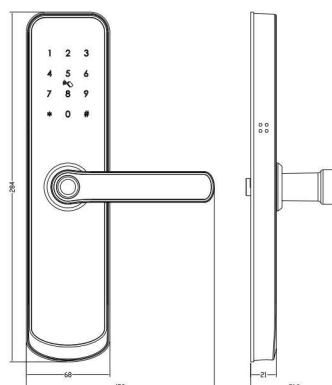

# A260 series Fingerprint Lock



Bluetooth connection  
(TTlock version)



Handle fingerprint  
scanner



Wifi  
(Tuya version)



IC card unlock



Timed password  
unlock



Key unlock





# A290 series

## Fingerprint Lock

### TTLOCK BLUETOOTH SOLUTION TUYA WIFI SOLUTION

#### Parameters :

- Patent design, designed by Italy engineer
- Aluminum Alloy Material
- Black or satin nickel treatment
- Acrylic reader with 12 digits passcode
- Work with BLE app, passcode, IC card and mechanical key
- High security cylinder and Micro-USB power charge for backup
- Auto lock and auto unlock with 60/70 adjustable deadbolt
- Perfect choice to replace the old locks without extra holes.
- Widely used for wood door or replace the knob locks.



TT Lock  
App



Tuya WiFi  
Version



Compatible with  
Amazon Alexa



Compatible with  
Google Home



Black



Silver

## A290 series Fingerprint Lock



Fingerprint



APP




Password



IC card



Key

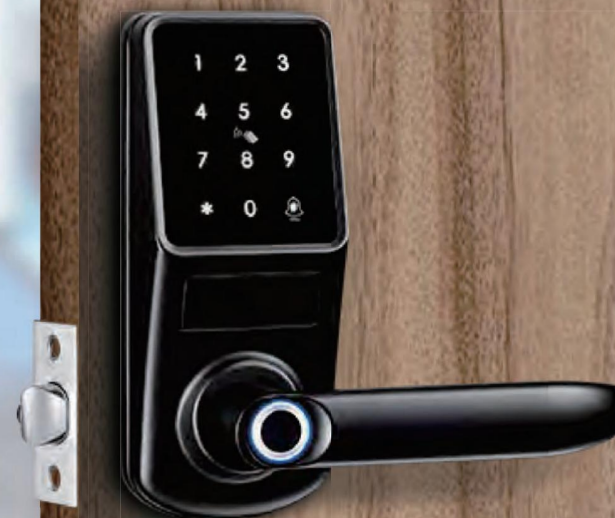

# L1

## Lever Fingerprint Lock



• Single Latch Version



• Double Mortise Version

### Parameter:

Material:	Zinc alloy
Surface Finishing:	Electroplated
Plate Size:	L145×W68
Unlock Way:	App, Password, Fingerprint or Key
App Name:	TTLock App or Tuya App
Support System:	IOS7.0 or Android 4.4 or above
Power Supply:	4pcs AAA alkaline batteries
Mortise:	Adjustable single latch (60/70mm) or double mortise
Color:	Black
Working Temperature:	-20~70 degree
Apply Door Thickness:	35~55mm
USB Back Up Power:	Yes
Application:	Office, Apartment, Home, School
Applicable For:	Wooden or Metal door



TTLock Version




Tuya Bluetooth  
Mesh Version



Compatible with  
Amazon Alexa




Compatible with  
Google Home

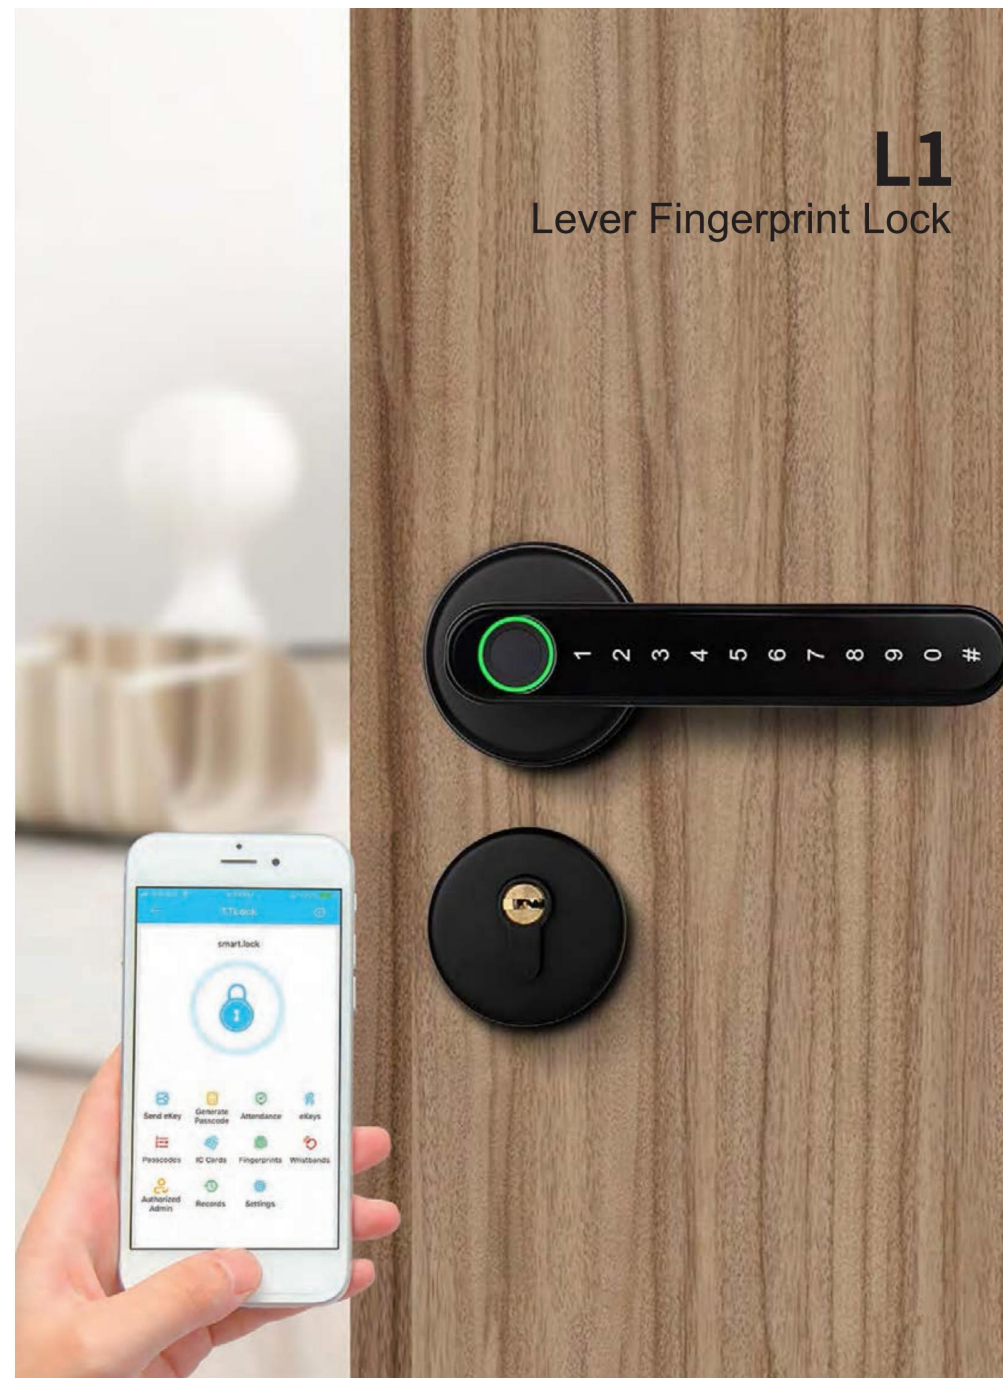



# D6

## Smart Knob Lock

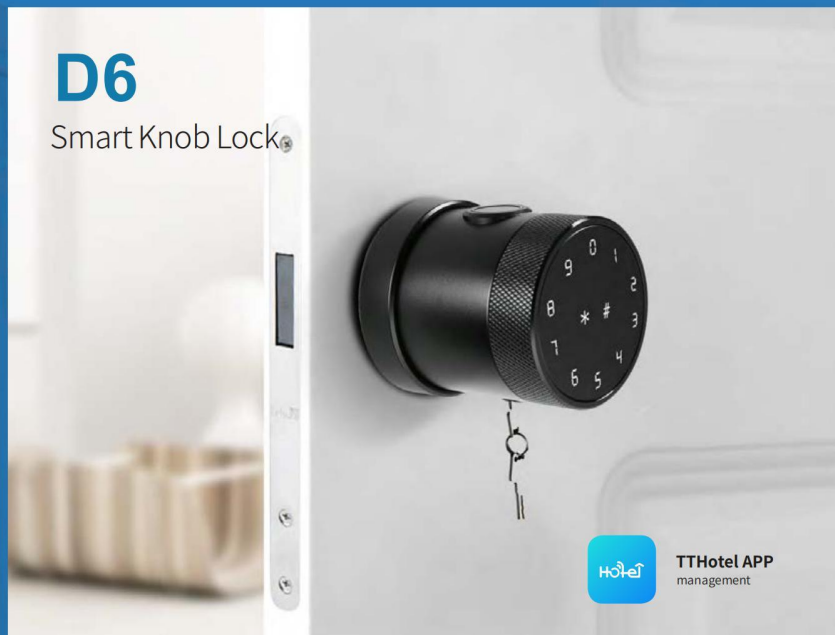

Material:	Zinc alloy
Surface Finishing:	Electroplated
Plate Size:	L70 X W60mm
Unlock Way:	App, Password, Fingerprint, Card, Wristband or Key
App Name:	TTLock App or Tuya App
Support System:	IOS7.0 or Android 4.4 or above
Power Supply:	4pcs AA alkaline batteries
Mortise:	Adjustable single latch (60/70mm)
Color:	Satin Finish / Black Nickle / Antique Copper / Gold
Working Temperature:	-25~70 degree
Apply Door Thickness:	35-65mm
USB Back Up Power:	Yes
Application:	Office, Apartment, Home, School
Applicable For:	Wooden or Metal door



TTLock Version



Tuya Bluetooth Mesh Version



Compatible with Amazon Alexa



Compatible with Google Home



Stain Finish



Black Nickle



Antique Copper



Antique Copper

# C1 series


Smart Window Handle Lock



# C1 series

Smart Window Handle Lock

ZINCALLOY



HANDLE LATCH


BATTERY PACK



TUYA APP  
Tuya Bluetooth  
Mesh Version





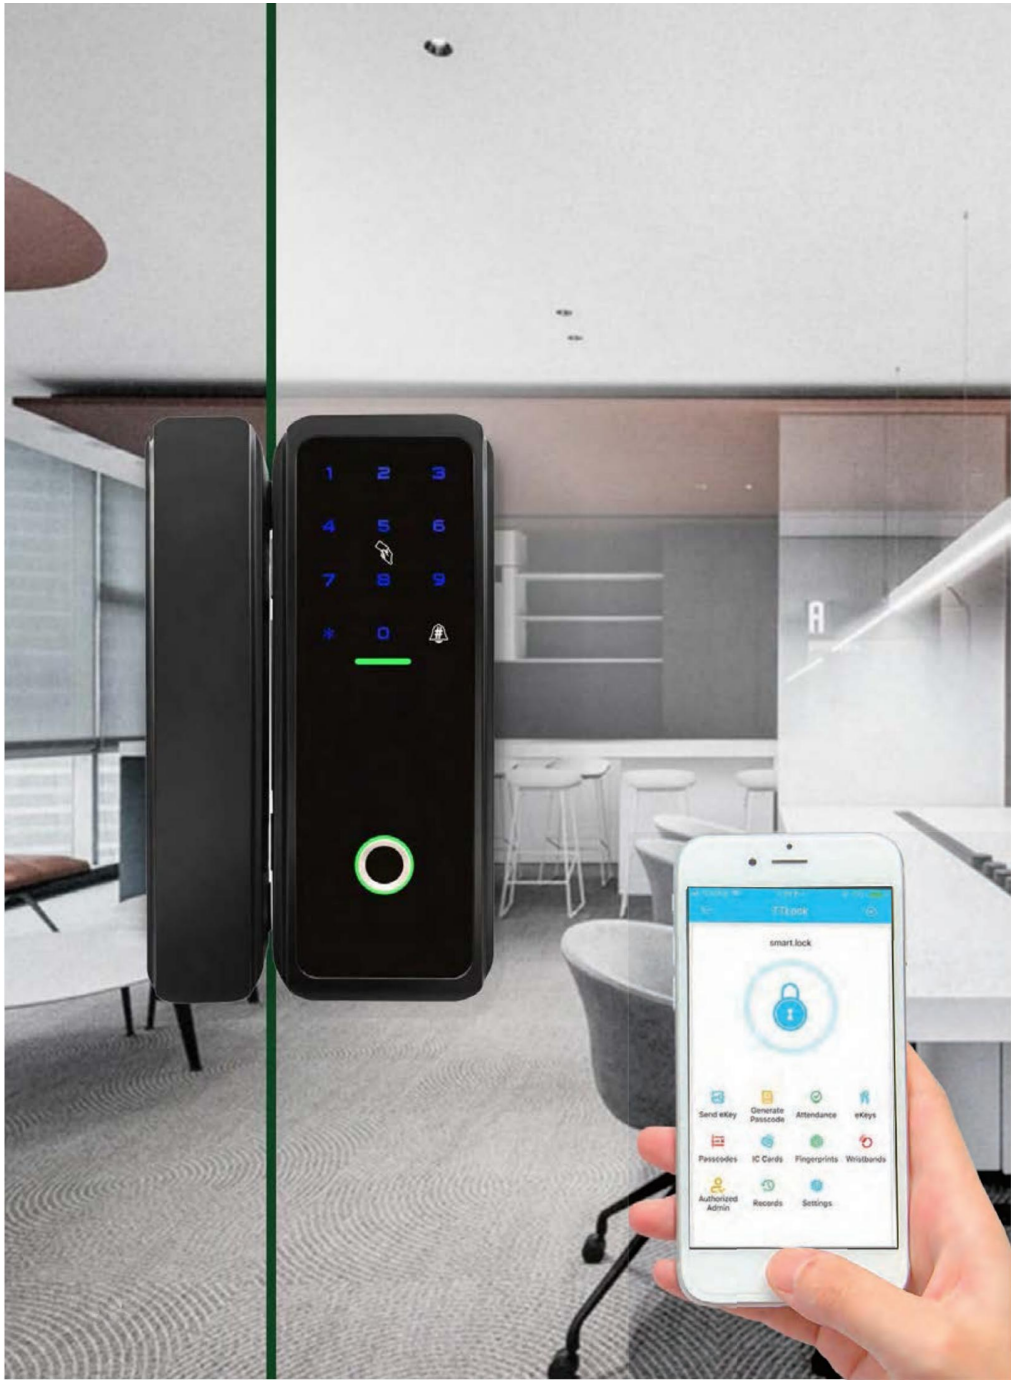

## A9

### Smart Fingerprint Glass Lock

Material:	Zinc alloy
Surface Finishing:	Electroplated
Plate Size:	L165×W72.5mm (Main panel) L165×W45.5mm (Side panel)
Unlock Way:	App, Password, Fingerprint, M1 Card or Wristband
App Name:	TTLock APP
Support System:	IOS7.0 or Android 4.4 or above
Power Supply:	4pcs AA alkaline batteries
Color:	Silver
Working Temperature:	-25~65 degree
Apply Door Thickness:	8~14mm(Glass door) or more 35mm
USB Back Up Power:	Yes
Application:	Office, Apartment, Home, School
Applicable For:	Glass door, Aluminum frame door, Wooden door etc.




TTLock Version



Compatible with  
Amazon Alexa



Compatible with  
Google Home

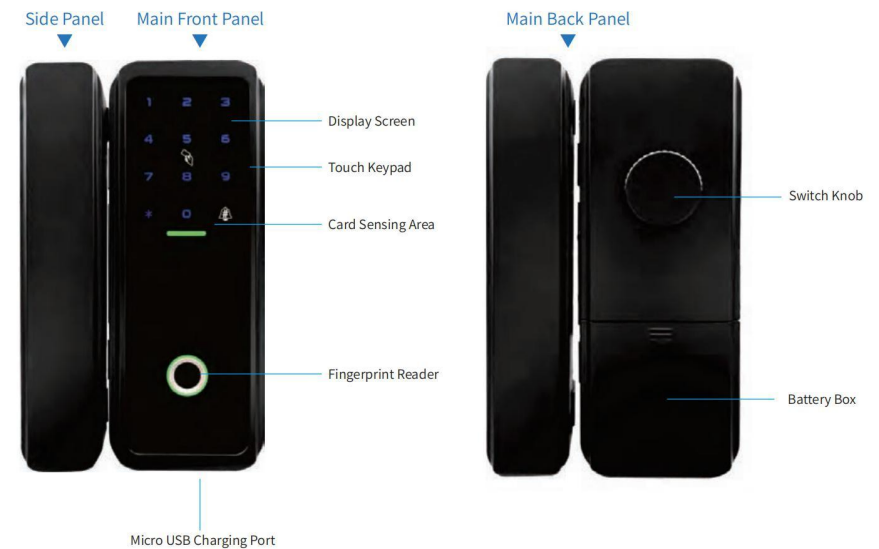



# K3

## Smart Key Box



TTLock Version





Tuya Bluetooth Mesh Version



Compatible with Amazon Alexa



Compatible with Google Home

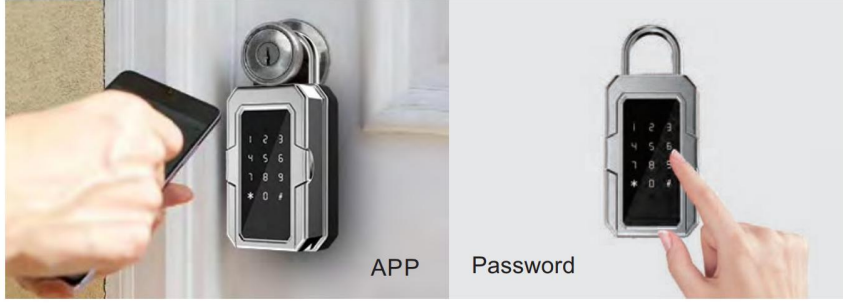

### Intelligent


Support ECHO Alexa voice assistant to manage access rights  
Control access from anywhere through the APP



# E280P Series

## BLUETOOTH DIGITAL APARTMENT LOCK


E280P-SS Satin Finish(70 ANSI Mortise)

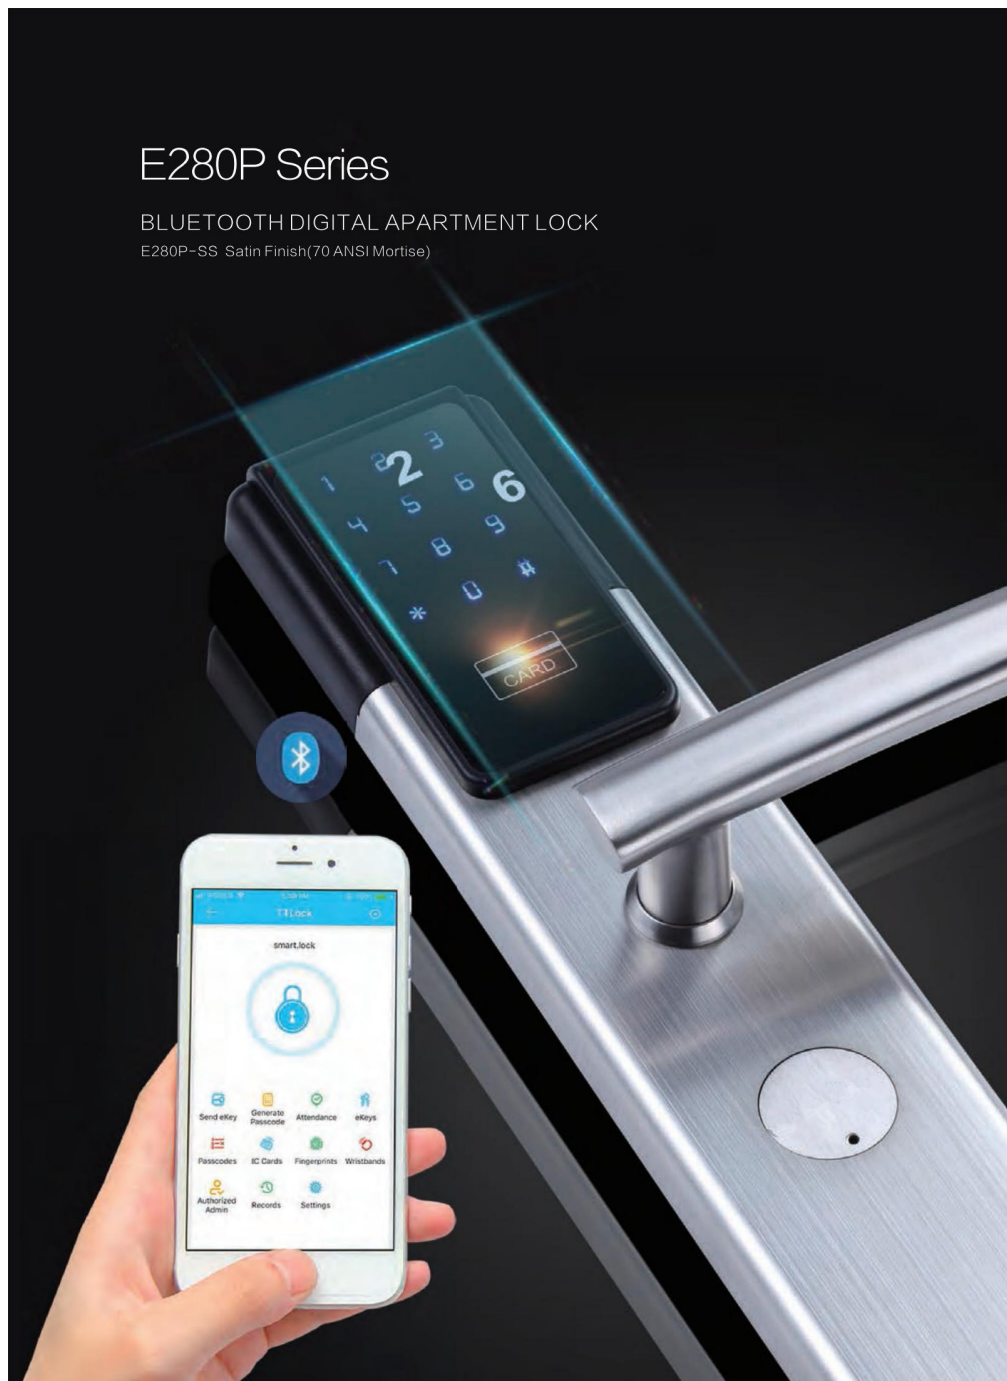

# E280P Series

## PARAMETERS

Mechanism: 304# front/back panel and handle  
 304# cylinder cover and handle collar ensure the use under high humidity area  
 Unlock way: IC card/Mobile APP/password or mechanical key  
 Power supply: 4xAA alkaline battery(DC6v)  
 Static current: 25uA  
 Dynamic current:< 150mA  
 Working temperature:-20~45 degree  
 Working humidity: 20~95%  
 Battery life: Normal open: 15000 times  
 Low power alarm: when power is less than 4.8v, there is di-di-di beep, then you can still open 150 times.  
 Audit trial: 990 latest records include the mechanical key  
 Available door thickness: 40~90mm  
 Available mortise: ANI mortise and 60-68 security mortise  
 Suggest usage: wood door

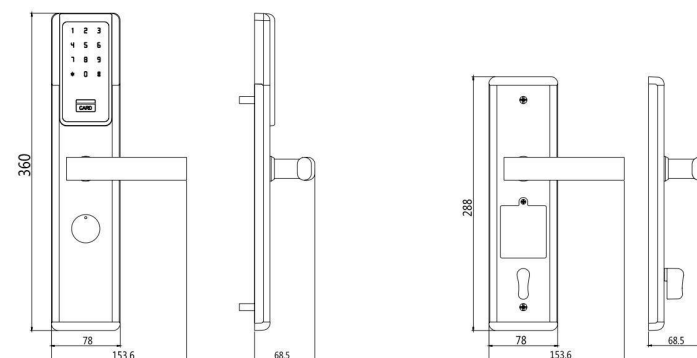

# E300P Series

## BLUETOOTH DIGITAL LOCK




# E300P Series

## BLUETOOTH DIGITAL LOCK

### Parameters :

- Classical design Bluetooth lock
- Unlock by Bluetooth APP/IC Card/Passcode or mechanical key
- 304# stainless steel material for lock handle and cylinder cover
- Work with ANSI mortise with 500000 times lifespan
- Free handle design to avoid the artificial damage
- Widely used to replace the apartment or office
- Available to change to Bluetooth hotel lock for hotel use.
- Support BS system with card encoder for management(Hotel version only)
- Emergency mechanical key, no worry for the unlock if there is no power

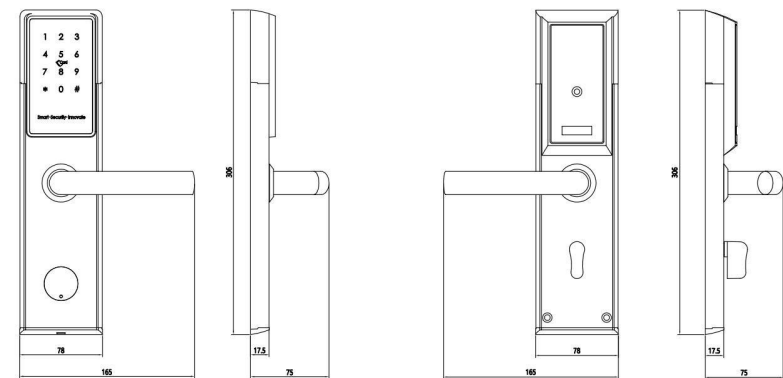



# E901P series


## Slim Design



E901P-BN



E901P-SS

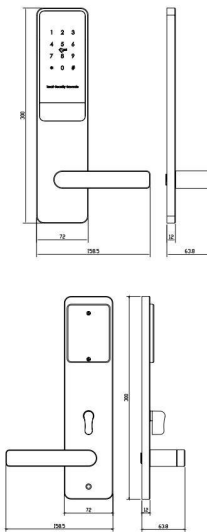


## E901P series

### BLUETOOTH DIGITAL LOCK

#### Parameters :


- Classical design Bluetooth lock
- Unlock by Bluetooth APP/IC Card/Passcode or mechanical key
- 304# stainless steel material for lock handle and cylinder cover
- Work with ANSI mortise with 500000 times lifespan

- Free handle design to avoid the artificial damage
- Widely used to replace the apartment or office
- Available to change to Bluetooth hotel lock for hotel use.
- Support BS system with card encoder for management(Hotel version only)
- Emergency mechanical key, no worry for the unlock if there is no power

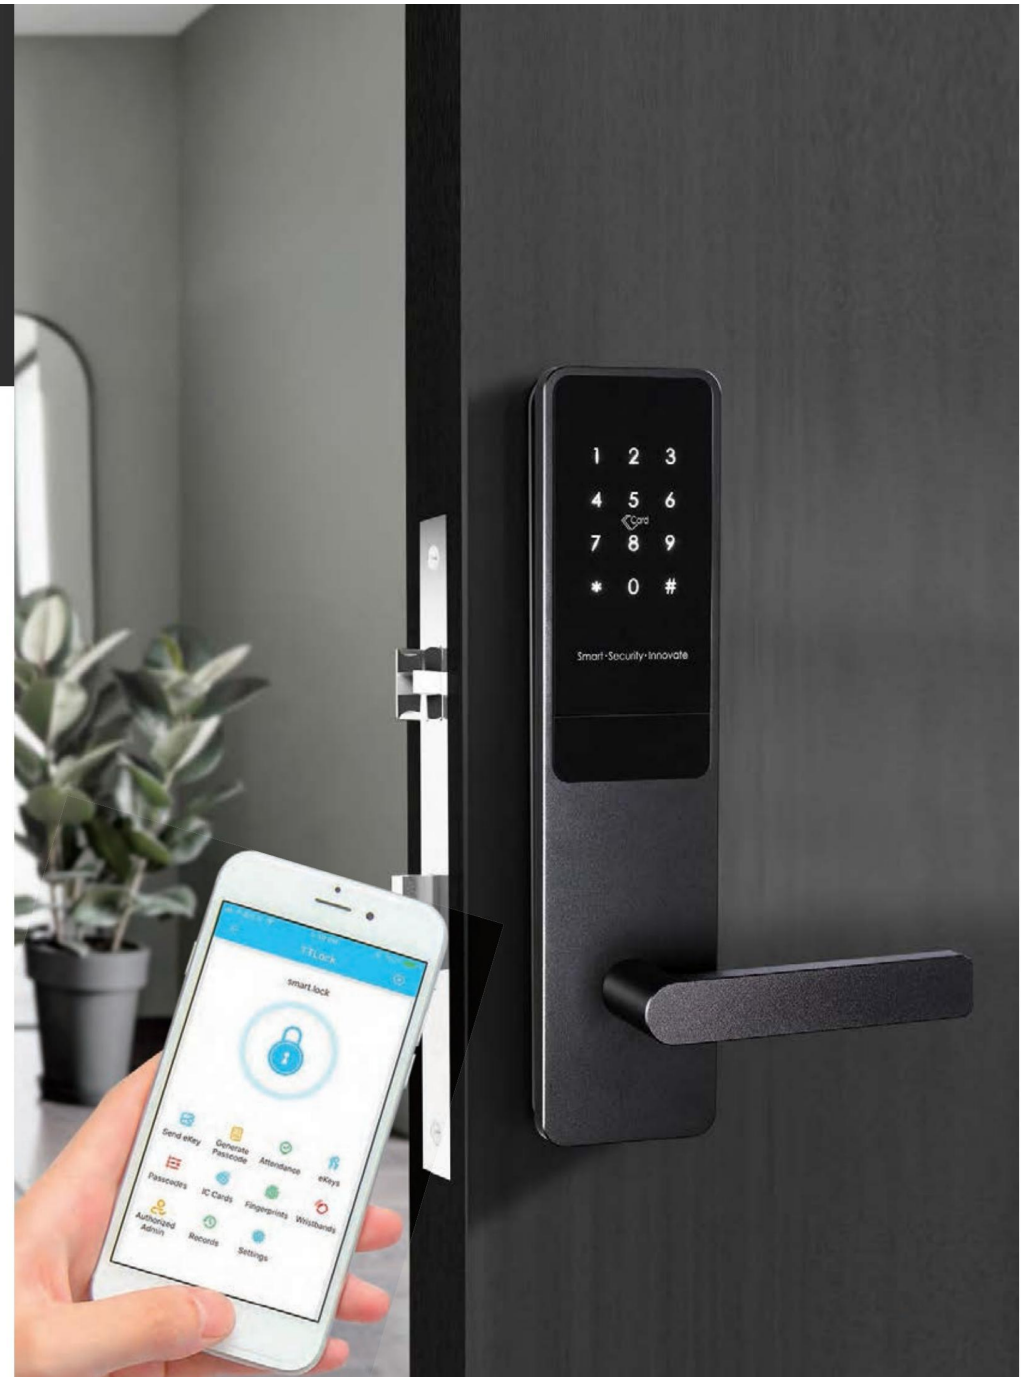

## E600P Series

BLUETOOTH DIGITAL APARTMENT LOCK

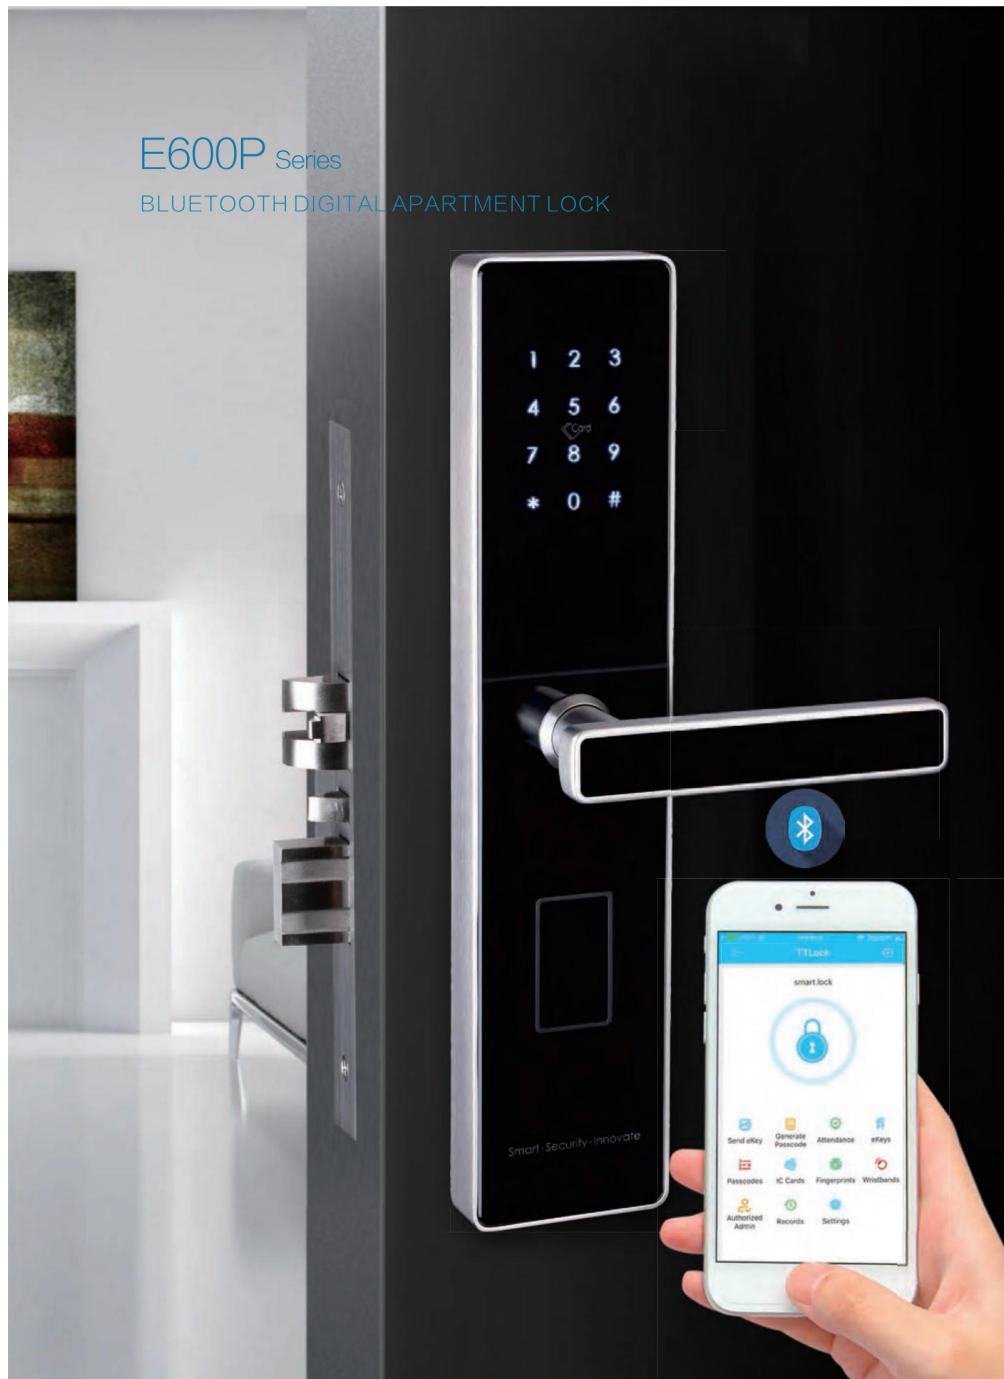


## E600P Series



E600P-SS Satin Finish

### PARAMETERS

Mechanism: 304# front/back panel and handle  
 Sliding cylinder cover and 304# handle collar  
 Unlock way: IC card/Mobile APP/password or mechanical key  
 Power supply: 4xAA alkaline battery(DC6v)  
 Static current: 25uA  
 Dynamic current:< 150mA  
 Working temperature:-20~45 degree  
 Working humidity: 20~95%  
 Battery life: Normal open: 15000 times  
 Low power alarm: when power is less than 4.8v, there is di-di-di beep, then you can still open 150 times.  
 Audit trial: 990 latest records include the mechanical key  
 Available door thickness: 40~90mm  
 Available mortise: ANI mortise and 60~68 security mortise  
 Suggest usage: wood door

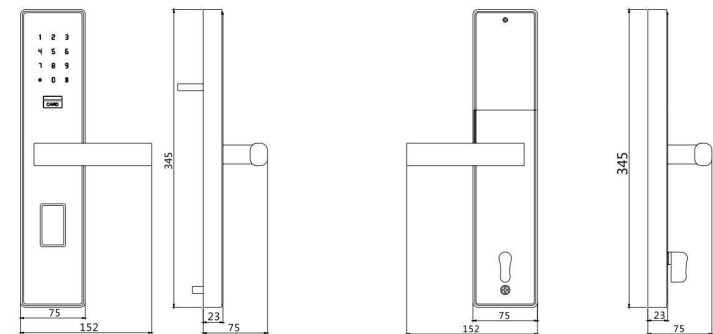



## HOTEL LOCK SYSTEM



Computer: Memory:500GB above, hard disk suggested 2G above, USB port required.  
 Software: Windows system, windows 7/8/10.  
 Database: Windows Access / Microsoft SQL server 2008 above.  
 Encoder: Read/write card and software registration.  
 Door Lock: Installed on each room.  
 LCD Handset: Configure room No., adjust time, audit trial records etc.  
 RF Card: Unlock the door lock.  
 Printer: as request from the site.

## LOCK SYSTEM ACCESSORIES

### MCE02-17 CARD ENCODER

#### Technical Parameter

- Working voltage: DC5V
- Rated current: 500mA
- Working humidity: RH 10%~90%
- working temperature: -20° C~55° C
- Reading speed: < 1 S
- Detect type: auto check

#### Specification

- Universal USB port, no need extra driver.
- Auto detect the card.
- Fast reading speed and stable to use
- Support one card system integration

### PHD01-16 LCD HANDSET

#### Technical Parameter

- Working voltage: DC3V
- Static current: < 10 uA
- Working current: <100mA
- Storage humidity: RH 5%~95%
- Working temperature: -25~70°C
- Reading speed: < 1 S
- Size: 177.6 x 85 x 30mm

#### Specification

- One station solution, no need special room setting card
- Fast and correct time adjustment
- Special system checking for hardware and firmware
- Easy to check the card information
- Convenient to check audit trial records
- Support checkout function,

## BLUETOOTH LOCK SYSTEM



APP QR(Android)



APP QR(IOS)

#### Technical Parameter

Power supply: 4pcs AA alkaline batteries.  
 Communication: Bluetooth 4.0.  
 System: Android 4.3 or IOS 7.0 above.  
 Static current: < 30uA  
 Working current: 150mA  
 Card type: Mifare 1  
 Reading distance: 0~2cm  
 Working temperature: -20~50°C  
 Storage temperature: -20~60°C  
 Storage humidity: 5%~95%

#### Specifications

Remote to modify the valid time for the passcode/card or ekey.  
 Remote to send the passcode or ekey.  
 Real time to check unlock record.  
 Remote to upgrade the lock system.  
 Real time to check the batter power of door lock.  
 Support WiFi router to remote to unlock.  
 Support multi-language under different system.  
 Save the management cost without the front reception.

## IOT Hotel APARTMENT LOCK SYSTEM

#### Technical Parameter

Power supply: 4pcs AA alkaline batteries.  
 Communication: 2.4G  
 Unlock way: card/passcode/Mobile/computer/mechanical key.  
 Static current: < 40uA  
 Working current: 150mA  
 System: Windows  
 Reading distance: 0~2cm  
 Working temperature: -20~50°C  
 Storage temperature: -20~60°C  
 Storage humidity: 5%~95%

#### Specification

Remote to modify the valid time for the passcode/card.  
 Remote to issue the passcode or card.  
 Real time to check unlock record.  
 Remote to upgrade the lock system.  
 Real time to check the batter power of door lock.  
 Real time to sending lock information.  
 Support multi-language under different system.  
 Save the management cost.  
 Available to integrate with the PMS.



## ENERGY SAVING SWITCH

The energy saver is specially designed to be used as power switch in the hotels, home, office, pubs, etc and suitable for Mifare/RF card to control the power with high security. It can save about 40% power consumption in your daily use.

Use method: You can insert one card into the switch to get the power, the signal light will show red. Upon drawing out the card, the power will be off after 15 seconds.

Special function: We offer the special savers that only accept the right room keycard. Such as 101 room, room key card from 102 will not work on 101 switch.



## INTRODUCTION

### 1. Intelligent Energy Saver(Model: ESS-MF40E)


Insert the RF card to the saver and power on the device inside the room, it is simple to install the saver and connect the cable with the input/output/null pole, it is safe and convenient to use with the high performance relay.

### 2.Room No. Type Energy Saver(Model:ESS-MF40S)

Only the right room card can be used on the saver for power. it is simple to install the saver and connect the cable with the input/output/null pole.

## PARAMETERS

Working voltage:AC220V  $\pm$  10%  
Working current:40A  
Rated power:7000W  
Time delay:15 seconds  
Dimension:86mm  $\times$  86mm  
Working temperature:-40°C ~ +50 °C  
Working humidity:RH 10%~90%;  
Material: flame-retardant PC.  
Color: White/Golden/Grey/Black

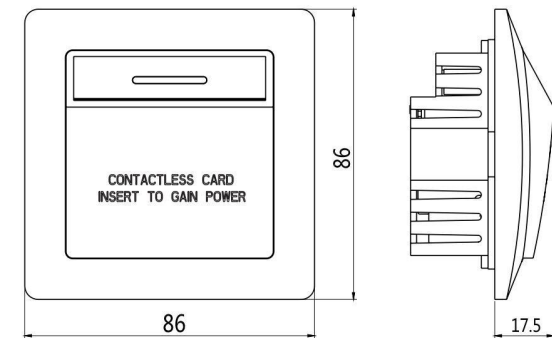



## ELEVATOR CONTROL

Model: EC01-16F



### INTRODUCTION


- Long reading distance (0~30mm)
- Support hotel guest card, no need extra software
- Three mode: free mode, Floor mode and Floor+time mode.
- Direct function: touch card and reach to the floor directly.
- Support public floor and valid time setting.
- Support audit trial function: 2000 records maximum.
- Fully compatible with the hotel locking software..
- Stainless steel reader with rubber gasket.



### PARAMETERS


Power supply: 12VDC  
 Working current: 1000mA  
 Card type: Mifare card  
 Reading distance: 0~30mm  
 Output method: 16 group always close contact(normal mode),  
 16 group always on contact(Direct mode)  
 Working temperature: -20~70℃  
 Storage temperature: -25~70℃  
 Working humidity: 5%~95%

### DIMENSION

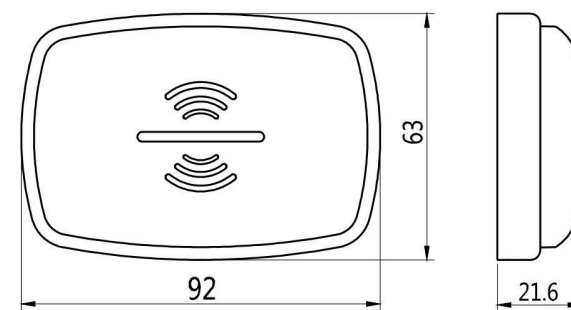

## WALL READER

Model:AC02-MF

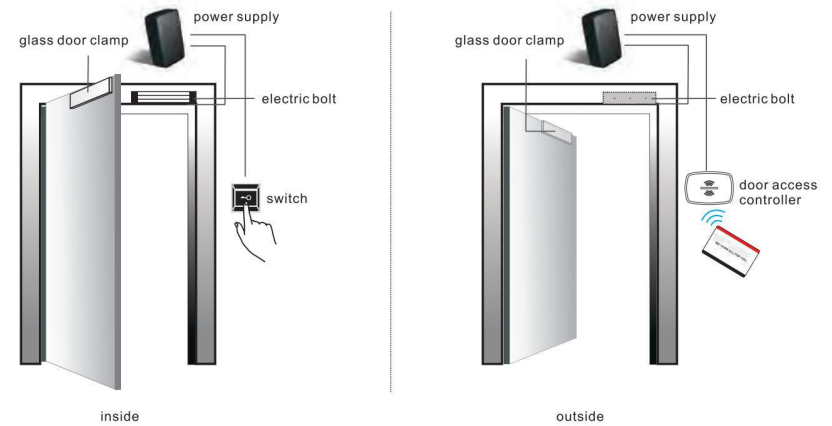


### INTRODUCTION

Support the hotel system card  
Reading distance: 0~3cm.  
No need extra software, easy to use.  
Available to control the electric drop bolt or  
electromagnetic lock or elevator floor button.  
Support wiegand 26 output signal.  
Stainless steel reader with rubber gasket to prevent the  
dust or water.

### PARAMETERS

Power supply: 12VDC  
Working current: 100mA  
Card type: Mifare 1  
Reading distance: 0~30mm  
Input method: Exit switch signal  
Output method: Dry contact 1 group(NO/NC/COM), Wiegand26  
Working temperature: -20~60℃  
Storage temperature: -25~70℃  
Storage humidity: 5%~95%

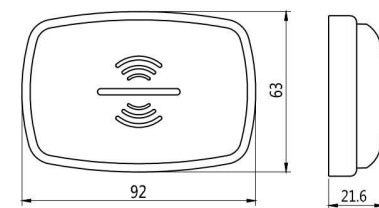







## 70# ANSI Mortise


M70#-204×29mm




M70#-240×22mm



M70#-204×29mm  
Reverse



M70#-240×22mm  
Reverse




### Specification:


With standard 70mm backset ANSI mortise.  
Inside parts are with blue zinc treatment to reach the environmental protection requirement.  
Microswitch inside the mortise is with over 1000,000 times life test.  
Latch and deadbolt parts are with 304# die casting stainless steel material, durable and reliable.  
Flat spring for the mortise is with imported piano wire with 500,000 times life test.  
Spindle part is with special steel and heat treatment with over 1000,000 times test.  
High quality motor with 500,000 times life test. ensure the long years use.  
Patent structure design with simple change for left and right direction.

## Europe Mortise


6085




4585



4085




3585



### Specification:

Available for 35/85,45/85,60/85 mortise for europe market.  
60/85 mortise is specially designed for mechanical key records.  
Mortise latches and deadbolt are with 304# stainless steel material.  
Available to use on the aluminum door with hotel lock Jk700.  
Available to change the old lock without changing the mortise.  
Mortise is with life test 300,000 times above.

## Europe motorized 55/72 mortise

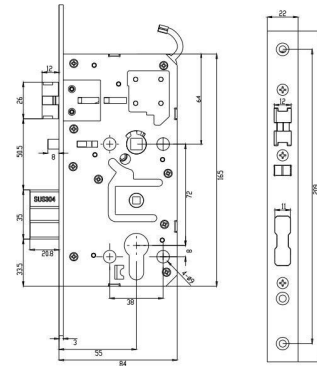

### Specification

Europe motorized 55/72 mortise  
Patent design for the inside structure  
Europe style mortise with 55mm backset  
304# die casting stainless steel latch and deadbolt  
304# spindle clutch ensure long time use  
Available to pull upward to activate the deadbolt